


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier
- majority carrier conduction
- Low power loss, High efficiency
- High current capability, low V_F
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals

SMB/DO-214AA

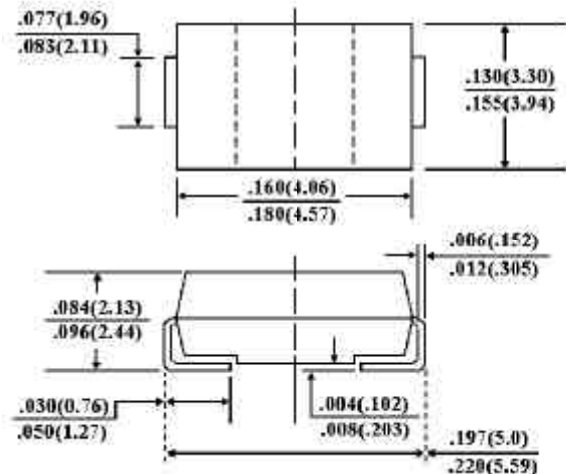

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case: JEDEC DO-214AA molded plastic
 Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
 Polarity: Color band denotes cathode
 Standard packaging: 12mm tape (EIA-481)
 Weight: 0.003 ounce, 0.093 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Resistive or inductive load.

	SYMBOLS	SR32	SR33	SR34	SR35	SR36	SR38	SR39	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	90	Volts
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	64	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	90	Volts
Maximum Average Forward Rectified Current at T_L (See Figure 1)	$I_{(AV)}$	3.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	80							Amps
Maximum Instantaneous Forward Voltage at 3.0A (Note 1)	V_F	0.50		0.70		0.85		Volts	
Maximum DC Reverse Current $T_A=25$ °C(Note 1)	I_R	0.5							mA
At Rated DC Blocking Voltage $T_A=100$ °C		20.0							
Maximum Thermal Resistance (Note 2)	$R_{\theta KJL}$ $R_{\theta KJA}$	17 55							°C/W
Operating Junction Temperature Range	T_J	-50 to +125							°C
Storage Temperature Range	T_{STG}	-50 to +150							°C

NOTES:

1. Pulse Test with PW=300 µsec, 2% Duty Cycle.
2. Mounted on P.C.Board with 5.0mm² (.013mm thick) copper pad areas.

RATING AND CHARACTERISTIC CURVES

SR32 THRU SR39


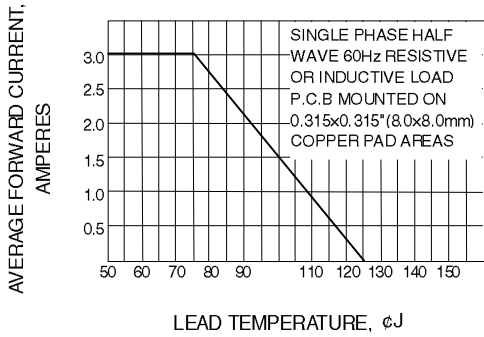


Fig. 1-FORWARD CURRENT DERATING CURVE

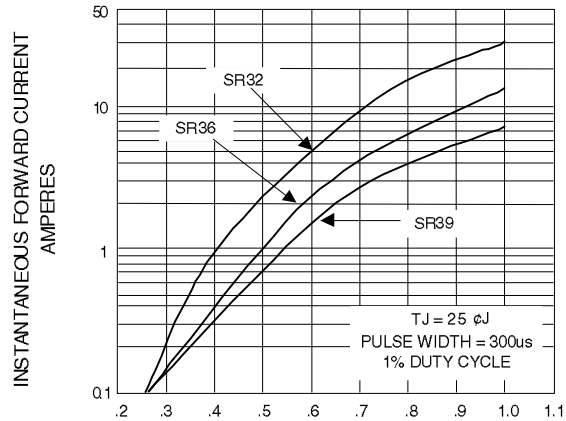

TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

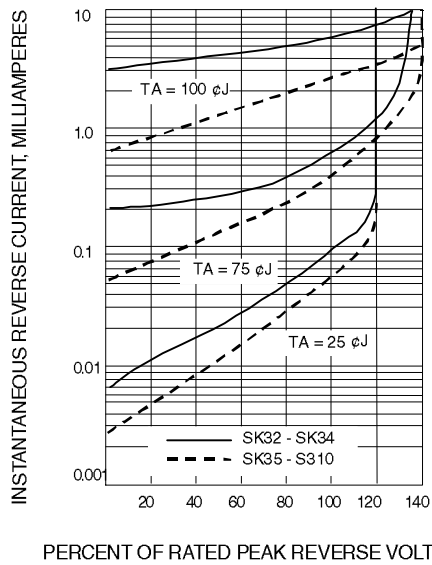


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

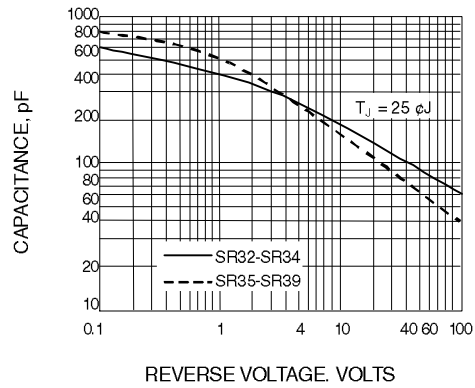


Fig. 4-TYPICAL JUNCTION CAPACITANCE

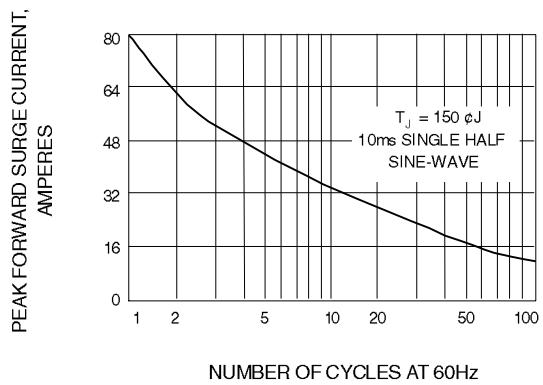


Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT